




OUTPUT TYPE


PLS Series - Output Type




大豪电子
 电话: 0775-83233025
<http://www.szdahao.com>
<http://www.very-tec.com>

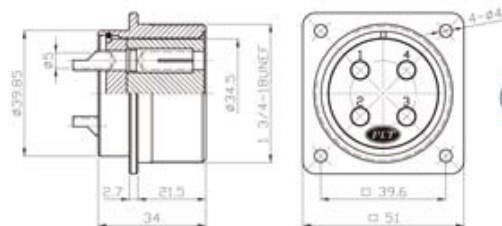


PLS-41-RF

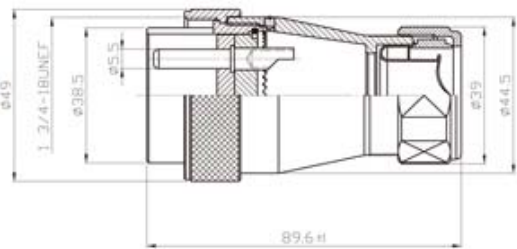

PLS-41-GPM6

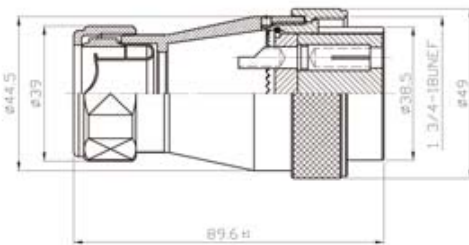

PLS-41-GPF6

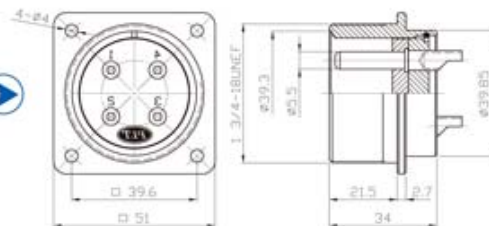

PLS-41-RM

◆ No. of contacts	4	8				
Contacts Configuration						
Rated current / voltage	30A 250V	15A 250V				
Operation limit voltage (AC.V,rms)	500	400				
Withstanding voltage (AC.V,rms) 1 minute	2500	2000				
Insulation resistance (MΩ MIN.) at DC 500V	2500	2000				
Contact resistance (MΩ MAX.) at DC 1A	3	3				
Solder inter diameter						