


## LITHIUM BATTERY PRODUCT LIST

Type	Model	IEC	Nominal Voltage (V)	Nominal Capacity(Ah)	Standard Discharge Current(mA)	Max. Continuous Discharge Current(mA)	Max. Pulse Discharge Current(mA)	Size	Temperature Range	Wt.(g)
Li/SOCI 2 Bobbin type	SB-AA02	ER14250	3.6	1.2	1	20	50	1/2AA	-55~85	9.0
	SB-AA02(P)	ER14250	3.6	1.2	1	20	80	1/2AA	-55~85	9.0
	SB-AA11	ER14500	3.6	2.5	2	60	100	AA	-55~85	16.0
	SB-AA11(P)	ER14500	3.6	2.5	2	60	150	AA	-55~85	16.0
	SB-A01	ER17500	3.6	3.65	3	70	160	A	-55~85	24.0
	SB-C02	ER26500	3.6	8.5	4	80	180	C	-55~85	51.0
Li/SOCI 2 Spiral type	SB-D02	ER33600	3.6	19.0	6	100	250	D	-55~85	100.0
	SW-AA01	ER14250	3.6	0.8	1	100	300	1/2AA	-55~85	9.0
	SW-AA11	ER14500	3.6	2.0	3	250	800	AA	-55~85	17.0
	SW-A01	ER17500	3.6	3.0	5	600	1,500	A	-55~85	30.0
	SW-C01	ER26500	3.6	6.0	15	900	1,800	C	-55~85	52.0
Military Pack	SW-D02	ER33600	3.6	14.0	20	1,800	3,000	D	-55~85	102.0
	BA-6853AK		14.4	13.0	80	1,800	3,000		-55~85	700.0
	BA-300K		28.4	26.0	80	1,800	3,000		-55~85	3,000
	BA-6813AK		10.8	13.0	80	1,800	3,000		-55~85	450.0
	BA-6818AK		14.4	13.0	80	1,800	3,000		-55~85	700.0
	BA-6802K		7.2	13.0	80	1,800	3,000		-55~85	240.0
	BA-6821AK		32.4	13.0	80	1,800	3,000		-55~85	1200.0
	BA-6863K		14.4	26.0	80	1,800	3,000		-55~85	1000.0
	BA-6812K		7.2	13.0	80	1,800	3,000		-55~85	250.0
	BA-6086K		10.8	4.0	80	1,800	3,000		-55~85	160.0
Li/MnO 2	BA-6218K		18	4.0	80	1,800	3,000		-55~85	220.0
	BA-6012K		7.2	4.0	80	1,800	3,000		-55~85	100.0
	BA-6085K		14.4	2.0	80	1,800	3,000		-55~85	3500.0
	CR123A	CR17350	3.0	1.5	14	1,000	3,500	2/3A	-30~60	16.0
	CR2	CR16270	3.0	0.8	10	800	2,500		-30~60	11.5

## PACKING INFORMATION

Type	Model	Unit/Packing	Net Wt.	Inner Box				Outer Box		
				Q'ty	Net Wt.(g)	Q'ty	Net Wt.(kg)	Gross Wt.(kg)	CBM	Dimension(mm)
	SB-AA02(P)	1pc.(Bulk)/TC,ST,P	9.2	100	980	1,000	9.8	10.7	0.0337	510x330x200
		1pc.(Bulk)/AX		30	316	300	3.2	4.1	0.0290	435x370x180
Li/SOCI2 Bobbin type	SB-AA11(P)	1pc.(Bulk)/TC,ST,P	16.0	100	1660	600	10.0	10.9	0.0337	510x330x200
		1pc.(Bulk)/AX		25	440	250	4.4	5.3	0.0290	435x370x180
	SB-A01	1pc.(Bulk)/TC,ST,P	24.0	90	2220	540	13.3	14.2	0.0337	510x330x200
	SB-C02	1pc.(Bulk)/TC,ST,P	51.0	50	2610	300	15.7	16.6	0.0357	515x347x200
	SB-D02	1pc.(Bulk)/TC,ST,P	100.0	30	3060	120	12.2	13.1	0.0337	510x330x200
	SW-AA01	1pc.(Bulk)/TC,ST,P	9.2	100	980	1000	9.8	10.7	0.0337	510x330x200
	SW-AA11	1pc.(Bulk)/TC,ST,P	17.0	100	1760	600	10.6	11.5	0.0337	510x330x200
Li/SOCI2 Spiral type	SW-A01	1pc.(Bulk)/TC,ST,P	30.0	90	2775	540	16.7	17.6	0.0337	510x330x200
	SW-C01	1pc.(Bulk)/TC,ST,P	51.0	50	2610	300	15.7	16.6	0.0357	515x347x200
	SW-D02	1pc.(Bulk)/TC,ST,P	102.0	30	3120	120	12.5	13.4	0.0337	510x330x200
Li/MnO2	CR123A	1pc.(Blister)	16.0	10	210	200	4.7	5.3	0.0202	509x228x174
		1pc.(Bulk)		100	1,649	800	13.2	14.0	0.0202	509x228x174
	CR-2	1pc.(Blister)	11.5	10	159	200	3.7	4.3	0.0202	509x228x174
	1pc.(Bulk)	40		539	960	12.9	13.7	0.0202	509x228x174	

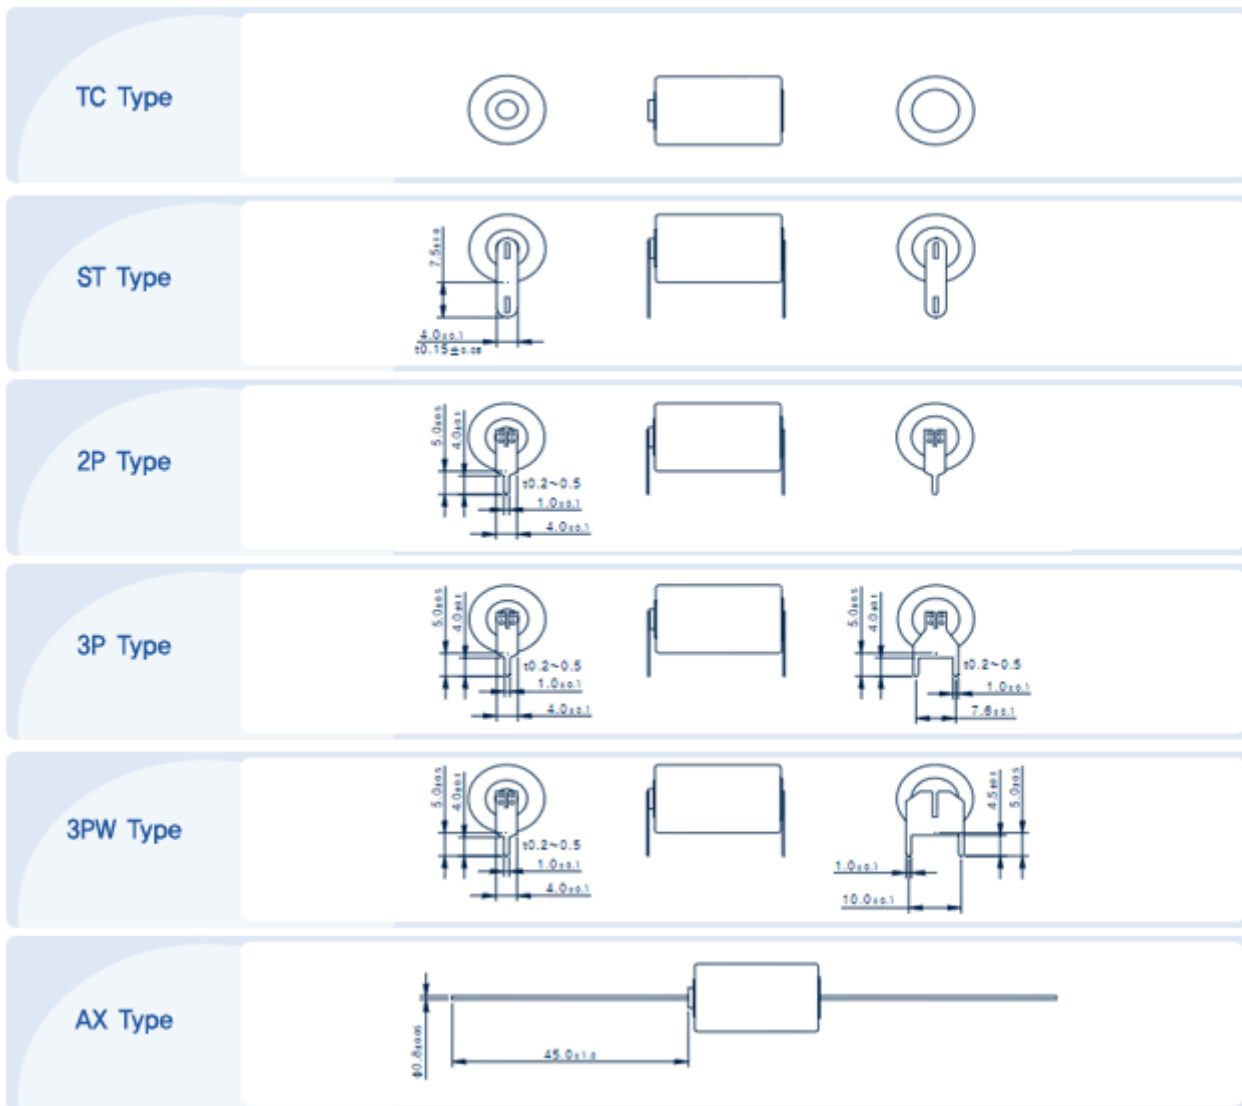

Connector Type

